


Black & Decker® POWER TOOLS

OWNER'S MANUAL

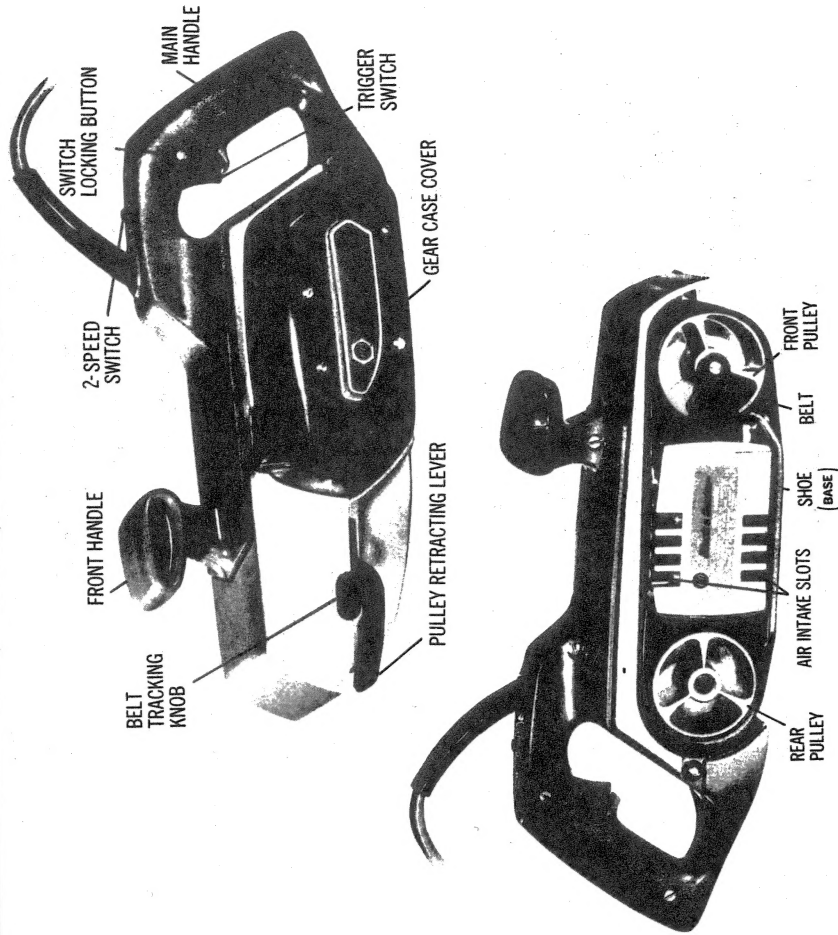

BELT SIZE: 3" x 24"

BELT SPEED: High — 1250, Low — 1050 Feet per Minute

SANDING SURFACE: 13.8 Sq. Inches

115 Volts A.C. 5.7 Amps. 3/4 H.P.

1. **KNOW YOUR POWER TOOL** — Read owner's manual carefully. Learn its applications and limitations as well as the specific potential hazards peculiar to this tool.
2. **GROUND ALL TOOLS — UNLESS DOUBLE-INSULATED.** If tool is equipped with three-prong plug, it should be plugged into a three-hole electrical receptacle. If adapter is used to accommodate two-prong receptacle, the adapter wire must be attached to a known ground. Never remove third prong.
3. **KEEP GUARDS IN PLACE** and in working order.
4. **KEEP WORK AREA CLEAN.** Cluttered areas and benches invite accidents.
5. **AVOID DANGEROUS ENVIRONMENT.** Don't use power tool in damp or wet locations. And keep work area well lit.
6. **KEEP CHILDREN AWAY.** All visitors should be kept safe distance from work area.
7. **STORE IDLE TOOLS.** When not in use, tools should be stored in dry, high or locked-up place — out of reach of children.
8. **DON'T FORCE TOOL.** It will do the job better and safer at the rate for which it was designed.
9. **USE RIGHT TOOL.** Don't force small tool or attachment to do the job of a heavy duty tool.
10. **WEAR PROPER APPAREL.** No loose clothing or jewelry to get caught in moving parts. Rubber gloves and footwear are recommended when working outdoors.
11. **USE SAFETY GLASSES** with most tools. Also face or dust mask if cutting operation is dusty.
12. **DON'T ABUSE CORD.** Never carry tool by cord or yank it to disconnect from receptacle. Keep cord from heat, oil and sharp edges.
13. **SECURE WORK.** Use clamps or a vise to hold work. It's safer than using your hand and it frees both hands to operate tool.
14. **DON'T OVERREACH.** Keep proper footing and balance at all times.
15. **MAINTAIN TOOLS WITH CARE.** Keep tools sharp at all times, and clean for best and safest performance. Follow instructions for lubricating and changing accessories.
16. **DISCONNECT TOOLS.** When not in use, before servicing: when changing accessories such as blades, bits, cutters, etc.
17. **REMOVE ADJUSTING KEYS AND WRENCHES.** Form habit of checking to see that keys and adjusting wrenches are removed from tool before turning it on.
18. **AVOID ACCIDENTAL STARTING.** Don't carry plugged-in tool with finger on switch.

Black & Veatch will correct, without charge, any defect **AT ANY TIME** which, upon examination at one of our Factory Service Branches, Authorized Service Stations, or Factories, is found to be due to faulty material or workmanship. The guarantee does not apply in cases of misuse or careless handling or where repairs or replacements have been made or attempted by others. Any transportation charges for delivering the unit for examination must be prepaid.


First, check the outlet by plugging in another tool or lamp. If these don't work, check the serviceable panel for blown fuses. If current is present, check plugs and sockets for tight fits. If there is no current, something wrong with the tool, don't attempt any major repair on your own. Take it or send it to the nearest Service location shown below for repair. A free parts diagram of your B&D tool is available by writing the Black & Decker Factory Service Center nearest you.

**See 'Tools-Electric'
-Yellow Pages-
for Service & Sales**

Area	Telephone	Area	Telephone
ALABAMA: Birmingham 35233, 1717 Third Ave. South 300	369-1	NEW MEXICO: Albuquerque 8210, 4700 Lomas Blvd. N.E. 505	265-64-00
ARIZONA: Phoenix 85004, 557 E. McDowell Rd. 480	813-327	NEW YORK: New York 10662, 1894 E. Tremont Avenue (Bronx) 212	927-2070
ARKANSAS: Little Rock 50020, 519 West Seventh Street 501	FR 2-3040	New York 10014, 2423 Park St. (Manhattan) 212	WM 9-6450
CALIFORNIA: Anaheim 92820, 1235 So. Euclid Ave. 714	FR 7-4000	New York 10012, 476 C. W. Ceram St. (Woodside) 212	WM 9-6450
Los Angeles 90007, 2433 S. Broadway 213	FR 9-0377	Rochester 14620, 476 C. W. Ceram St. (Woodside) 212	WM 9-6450
San Diego 92104, 1915 Stevenson Street 619	AT 1-3334	Syracuse 13224, 2140 Erie Blvd. E. 315	445-3300
San Diego 92105, 3811 E. Canon Blvd. 619	AT 1-3331	NORTH CAROLINA: Charlotte 28205, 1710 N. Graham St. 704	FR 5-3721
San Diego 92106, 2291 E. Canon Blvd. 619	AT 1-3331	Greensboro 27405, 1000 W. 19th St. 336	336-2100
Santa Clara 95050, 2291 E. Canon Blvd. 408	801-7278	Greensboro 27405, 1000 W. 19th St. 336	336-2100
COLORADO: Denver 80204, 675 Kalmar St. 303	322-0671	OHIO: Cincinnati 45203, 1225 Western Ave. 513	513-2100
CONNECTICUT: Hartford 60102, 131 Meadow Street 203	249-6621	Cleveland 44113, 3901 Detroit Ave. 216	216-424-2700
FLORIDA: Jacksonville 32208, 5222 Pearl Street 904	366-2951	Cleveland 44113, 3901 Detroit Ave. 216	216-424-2700
Miami 33132, 2075 N.W. 54th Street 305	NE 3-9899	Dayton 45420, 1233 N. High Street 513	513-2100
Tempe 85283, 3041 S. P. Kennedy Blvd. 602	852-1553	Dayton 45420, 1233 N. High Street 513	513-2100
GEORGIA: Atlanta 30303, 675 Peachtree Street N.W. 404	JA 4-0431	Indianapolis 46204, 2623 W. Central Ave. 317	317-625-2700
HAWAII: Honolulu 96813, 675 Punch Street 808	569-374	Indianapolis 46204, 2623 W. Central Ave. 317	317-625-2700
ILLINOIS: Chicago 60646, 1100 W. Jackson Blvd. 312	TA 9-3800	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
Chicago 60646, Lincolnwood, 6710 N. Crawford St. 312	FR 9-0933	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
Chicago 60646, Lincolnwood, 6710 N. Crawford St. 312	FR 9-0933	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
Indianapolis 46201, 725 South St. W. 317	788-1744	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
INDIANA: Evansville 47708, 931 Bond Street 317	632-5529	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
Indianapolis 46207, 1125 W. 16th Street 317	632-5529	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
IOWA: Des Moines 50312, 2811 Interstate Ave. 515	FR 3-6571	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
KANSAS: Wichita 67214, 4203 Park Blvd. 316	562-1455	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
LOUISIANA: Louisiana 70029, 4407 Poin Blvd. 504	552-2344	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
MARYLAND: Baltimore 21201, 4712 E. E. E. 20th Street 301	552-2344	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
Baltimore 21205, 4712 E. E. E. 20th Street 301	552-2344	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
Blacksburg 20710, 4212 E. E. E. 20th Street 301	779-3088	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
MASSACHUSETTS: Boston 02133, 121 Market St. (Brighton) 617	ST 2-6264	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
MICHIGAN: Detroit 48201, 1813 W. McChesney Rd. 313	534-8880	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
Grand Rapids 49509, 5662 City Park Ave. S.W. 616	534-8880	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
MINNESOTA: Minneapolis 55408, 2815 Nicollet Ave. 612	HA 1-4593	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
MISSOURI: Kansas City 64108, 2705 Midco Trafficway 314	HA 1-4593	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
NEBRASKA: Omaha 68102, 2218 Leavenworth Street 402	345-3230	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
NEW JERSEY: Newark 07104, 866 Broadway 201	HA 3-1076	OKLAHOMA: Oklahoma City 73106, 1318 Linwood Blvd. 405	405-275-3100
BLACK & DECKER MFG. CO., Limited, Canada			
BROCKVILLE, ONTARIO	1-800-387-2222	DON MILLS (Toronto)	2-Valleybrook Drive
EDMONTON, ALBERTA	11400 Ave. 42, S.W.	EDMONTON, ALBERTA	11400 Ave. 42, S.W.
HAULFAX, NOVA SCOTIA	183 McLellan Street	HAULFAX, NOVA SCOTIA	183 McLellan Street
LONG BEACH, CALIFORNIA	Kings Shopping Plaza	LONG BEACH, CALIFORNIA	Kings Shopping Plaza
MONTREAL, QUEBEC	7655 St. Lawrence Blvd.	MONTREAL, QUEBEC	7655 St. Lawrence Blvd.
OTTAWA, ONTARIO	418 Laurier Avenue, West	OTTAWA, ONTARIO	418 Laurier Avenue, West
AUTHORIZED SERVICE STATIONS			
ALABAMA: Montgomery	CONNECTICUT: New Haven	MINNESOTA: Minneapolis	NEW YORK: New York
ALASKA: Anchorage	DELAWARE: Wilmington	MISSOURI: Kansas City	NEW YORK: New York
ARIZONA: Tucson	FLORIDA: Panama City	NEBRASKA: Omaha	NEW YORK: New York
CALIFORNIA: Fresno	IDAHO: Boise, Lewiston	NEW YORK: New York	NEW YORK: New York
TEXAS: Corpus Christi	OHIO: Youngstown	NEW YORK: New York	NEW YORK: New York
WIRGINIA: Roanoke	FLORIDA: Panama City	NEW YORK: New York	NEW YORK: New York

BELT TRACKING ADJUSTMENT

Before sanding with a new belt, plug in the tool and hold it in the position shown in figure at right. Depress the switch and note whether the belt "tracks" evenly, keeping its outer edge flush with the outer edge of the shoe. If the belt starts to deviate from a straight track, rotate the Tracking Adjustment Knob slightly forward or backward until belt tracks evenly. When sanding, occasionally check to see if belt is tracking properly and adjust when necessary.

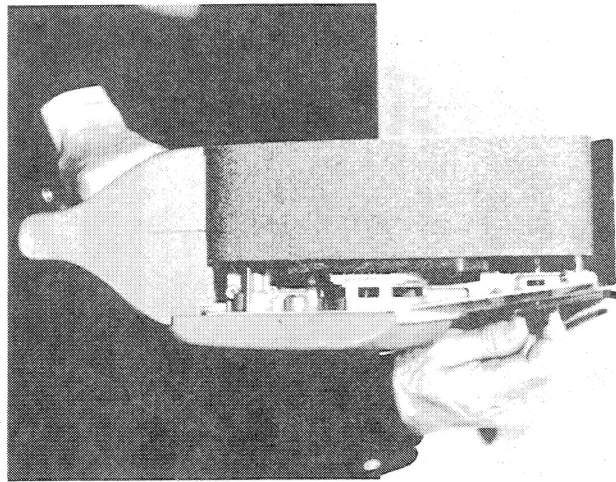

OPERATION

Start the tool with the belt off of the work. Hold both handles firmly and begin your initial sanding stroke as the tool contacts the work. Keep the Sander moving to insure even sanding, and, in most cases, the weight of the tool provides sufficient pressure for proper sanding. Lift the Sander from the work before turning tool "OFF" to prevent gouging. High speed operation can be used for fast removal of material. Low speed is recommended for a final smooth finish.




SAFETY WITH BELT SANDERS

1. Before changing belts, or at any time the tool is not actually being used, be sure that the trigger switch is in the "OFF" position and that the cable is unplugged from the power supply.
2. Before plugging in the cable, be sure that the trigger switch is in the "OFF" position.
3. When starting or stopping the Sander hold the tool off of the work surface to prevent it from "running away" or gouging.
4. Use correct size belts — 3" x 24".

GROUNDING

EVERY ELECTRIC TOOL SHOULD BE GROUNDED while in use to protect the operator against shock. This unit is equipped with approved 3-conductor cord and 3-blade grounding type attachment plug to be used with the proper grounding type receptacle. The green colored conductor in the cord is the grounding wire. Never connect the green wire to a "live" terminal. If your unit requires less than 150 volts, it has a plug that looks like fig. "A". A special grounding adapter (Fig. "B") is available from your dealer to permit using 2-wire receptacle until the correct receptacle is properly installed. The green grounding wire extending from the side of the adapter must be connected to a PERMANENT GROUND such as a properly grounded outlet box. If the unit requires from 150 to 250 volts it has a plug like Figure "C". No adapter is available and it should be used in the proper standard matching 3-wire grounding receptacle.

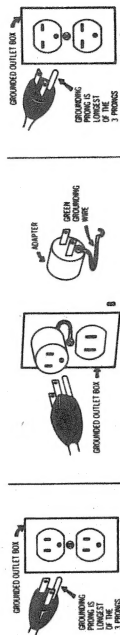

CABLE

When using the tool at a considerable distance from power source, a properly grounded extension cable of adequate size must be used to prevent loss of power and over-heating. Use table at right for 115 Volt tools.

Ext. cable length in feet	.25	50	75	100	150	200
Required wire size (A.W.G.) in cable	.18	16	14	12	12	10




SWITCHES

PRACTICE THE FOLLOWING BEFORE PLUGGING TOOL INTO POWER SUPPLY:

1. Pulling the Trigger Switch turns the motor "ON" and puts the belt in motion. Releasing the Trigger turns the motor "OFF" and stops the belt.
2. To lock the motor "ON" for continuous sanding —
 - (a) Pull and hold back the Trigger.
 - (b) Depress and hold in the Locking Button.
 - (c) Release Trigger and release Locking Button and tool will stay "ON".
 - (d) To turn tool "OFF," pull and release Trigger.
3. 2-Speed Switch is located on top of handle. Push forward for high speed, push back for low speed. Switch position may be changed while motor is in operation. High speed 1250 feet per minute, low speed 1050 feet per minute.
4. Always lift the Sander so that the belt is free from contact with any material before turning the tool "ON." This will prevent a sudden forward "jump" of the tool as the belt begins to move.

CHANGING BELTS

1. UNPLUG TOOL FROM POWER SUPPLY.
2. Pull out the Pulley Retracting Lever which releases the tension on the belt.
3. The worn belt can then be slipped off the pulleys and be replaced by a new one. See figure at right. Be sure that the arrow stamped on the belt points in the direction around the pulleys as shown.
4. The outer edge of the new belt should be lined up flush with the outer edge of the shoe. Push Pulley Retracting Lever back in close to the tool.
5. Adjust for proper belt tracking as follows on next page.

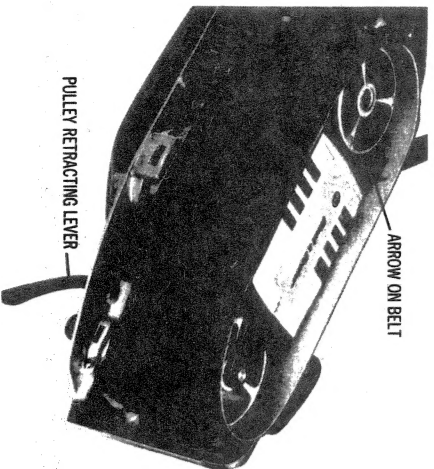

BELT SANDER CARE & CLEANING

All bearings in your Belt Sander are of the sealed-lubricant type and do not require any relubrication.

Frequent cleaning of all accessible areas in and around the housing, with a vacuum cleaner nozzle, will keep your tool running cooler and more efficiently.

If you notice the tool motor running slower than usual or losing power, or, you notice heavy sparking through the air intake slots, immediately take or send the tool to your nearest B&D Service Center for possible motor-brush replacement and a thorough cleaning and inspection.

COMMUTATOR AND BRUSHES

Inspect carbon brushes often. The brushes are located under the motor housing cover, to which the name plate is secured, on the flush side of the sander. Make certain cable is unplugged from power supply. Remove the two screws at the top of this cover. The name plate will act as a hinge, and the top half of the cover can be lowered providing access to the motor brushes. Replace when brushes are worn down to the identifying letter or groove or when spring exerts insufficient pressure to hold brush against commutator. Keep brushes clean and sliding freely in guides. Inspect commutator for dirt and excessive wear. If dirty or rough, clean lightly with very fine sandpaper (NOT emery cloth). If badly worn or grooved, send tool to our nearest service station for repair.

3" x 24" SANDING BELTS

These Belts are precision-made, cut and bonded for accurate fit. Use on Black & Decker and other make Belt Sanders using a 3" x 24" belt.

C58368	36 coarse	CLOSED COAT ALUMINUM OXIDE for unfinished or new wood, ferrous metal, non-ferrous metals (aluminum, lead, copper, solder).
C58370	40 coarse	
C58372	50 medium	
C58374	60 medium	
C58376	80 medium	
C57378	100 fine	OPEN COAT ALUMINUM OXIDE for removing lacquer, paint or varnish. Also for Green or resinous wood.
C58380	120 fine	
C58367	24 coarse	
C58369	36 coarse	
C58371	40 coarse	
C58373	50 medium	
C58375	60 medium	
C58377	80 medium	
C58379	100 fine	